




# Reference Manual

## D VD 3020

### Dual SDI Distribution Amplifier

Series 3000  
*MiniModules*

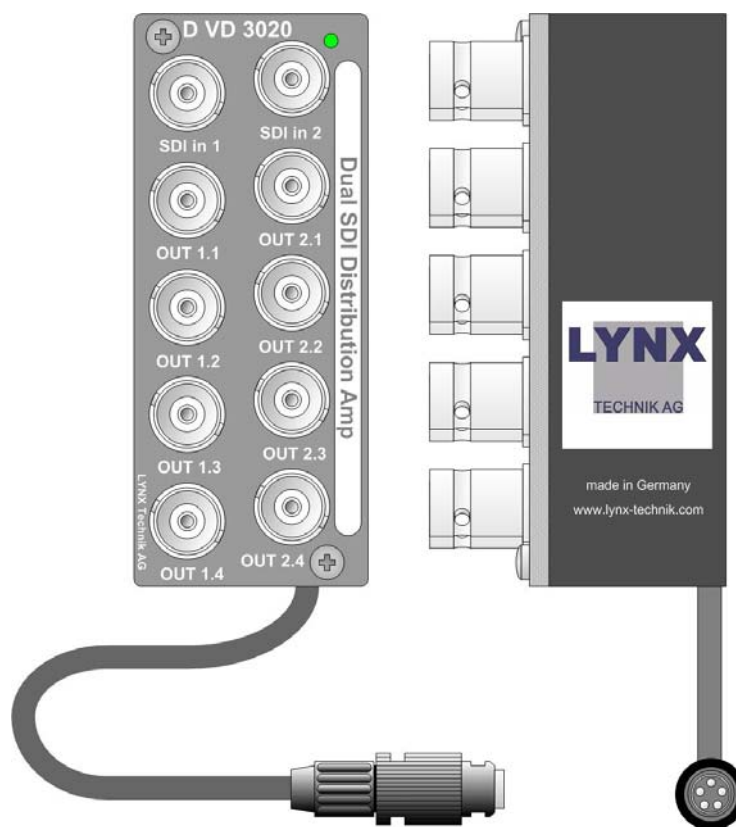

© LYNX Technik AG  
Brunnenweg 3  
64331 Weiterstadt  
Germany  
[www.lynx-technik.com](http://www.lynx-technik.com)

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, without express written permission of LYNX Technik AG.

LYNX Technik AG may have patents, patent applications, trademarks, copyrights or other intellectual property rights covering the subject matter in this document. Except as expressly written by LYNX Technik AG, the furnishing of this document does not give you any license to patents, trademarks, copyrights or other intellectual property of LYNX Technik AG or any of its affiliates.

© LYNX Technik AG 2002 all rights reserved

# Warranty

LYNX Technik AG warrants that the product will be free from defects in materials and workmanship for a period of two (2) years from the date of shipment. If this product proves defective during the warranty period, LYNX Technik AG at its option will either repair the defective product without charge for parts and labor, or will provide a replacement in exchange for the defective product.

In order to obtain service under this warranty, customer must notify LYNX Technik of the defect before expiration of the warranty period and make suitable arrangements for the performance of service. Customer shall be responsible for packaging and shipping the defective product to the service center designated by LYNX Technik, with shipping charges prepaid. LYNX Technik shall pay for the return of the product to the customer if the shipment is within the country which the LYNX Technik service center is located. Customer shall be responsible for payment of all shipping charges, duties, taxes and any other charges for products returned to any other locations.


This warranty shall not apply to any defect, failure, or damage caused by improper use or improper or inadequate maintenance and care. LYNX Technik shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than LYNX Technik representatives to install, repair or service the product; b) to repair damage resulting from improper use or connection to incompatible equipment; c) to repair any damage or malfunction caused by the use of non LYNX Technik supplies; or d) to service a product which has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty servicing the product.

**THIS WARRANTY IS GIVEN BY LYNX TECHNIK WITH RESPECT TO THIS PRODUCT IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. LYNX TECHNIK AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LYNX TECHNIK`S RESPONSIBILITY TO REPAIR AND REPLACE DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THIS WARRANTY. LYNX TECHNIK AND ITS VENDORS WILL NOT BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES IRRESPECTIVE OF WHETHER LYNX TECHNIK OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.**

# Regulatory information

## Europe

### Declaration of Conformity

We	LYNX Technik AG Sandstrasse 7 D-64404 Bickenbach Germany
<i>Declare under our sole responsibility that the product</i>	
TYPE: D VD 3020	
<i>To which this declaration relates is in conformity with the following standards (Environments E1-E3):</i>	
EN 55103-1 /1996	
EN 55103-2 /1996	
EN 60950 /2001	
<i>Following the provisions of 89/336/EEC and 73/23/EEC directives.</i>	
	Winfried Deckelmann
Weiterstadt, October 2003	
<i>Place and date of issue</i>	<i>Legal Signature</i>

## USA

### FCC 47 Part 15

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to the part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense

---

# Contents

<b>Warranty</b> .....	<b>3</b>
<b>Regulatory information</b> .....	<b>4</b>
Europe.....	4
Declaration of Conformity .....	4
USA .....	4
FCC 47 Part 15.....	4
<b>Contents</b> .....	<b>5</b>
<b>Getting Started</b> .....	<b>7</b>
Packaging.....	7
Product Description .....	7
Functional Diagram .....	8
Module Layout .....	8
<b>Connections</b> .....	<b>10</b>
Video Connections.....	10
Power Connections .....	11
DC Power Connector .....	11
<b>Installation</b> .....	<b>12</b>
Mechanical.....	12
Stand Alone Operation .....	12
Multiple Units.....	13
Electrical Installation.....	14
Stand Alone Operation .....	14
Multiple Units.....	15
<b>Settings and Control</b> .....	<b>15</b>
Switch Settings .....	16
Switch Function Detail .....	17
Factory Preset Condition.....	17
<b>Alarm/LED Status Indicators</b> .....	<b>18</b>
Channel Condition Indicators .....	18
Front Panel Alarm Indicator .....	18
Locate Function.....	19
Auto Store .....	19
<b>Specifications (D VD3020)</b> .....	<b>20</b>
<b>Available Options</b> .....	<b>21</b>
<b>Parts List</b> .....	<b>22</b>
<b>Service</b> .....	<b>22</b>
<b>Contact Information</b> .....	<b>23</b>

This Page is intentionally left blank

# Getting Started

## Packaging

The shipping carton and packaging materials provide protection for the module during transit. Please retain the shipping cartons in case subsequent shipping of the product becomes necessary.

## Product Description

The D VD 3020 is a high quality digital video distribution amplifier designed primarily for broadcast and professional applications.

Flexible configurations allow the D VD 3020 to be used in dual 1 to 4 applications or 1 to 8 applications. Outputs can be reclocked, or non-reclocked and even split between reclocked and non-reclocked outputs within the same module. Auto detection of standard digital video bit rates in reclocked mode (143Mbit/s, 177Mbit/s, 270Mbit/s, 360Mbit/s, 540Mbit/s) and will transparently pass data from 10Mbits/s to 640Mbits/s in non-reclocked mode.

The D VD 3020 is part of the 3000 series of MiniModules, which offer high quality, modularity and flexibility in a very small form factor ideal for applications where space is at a premium.

The modules can be used either stand alone using the optional power supply brick, or as part of a tightly integrated space saving system where up to 10 MiniModules can be mounted utilizing the optional LYNX R FR 3005 / 3010 rack housing. This includes integrated power supply and optional remote control interfaces.

## Functional Diagram

Figure 1 below is the basic functional diagram for the D VD 3020 MiniModule.

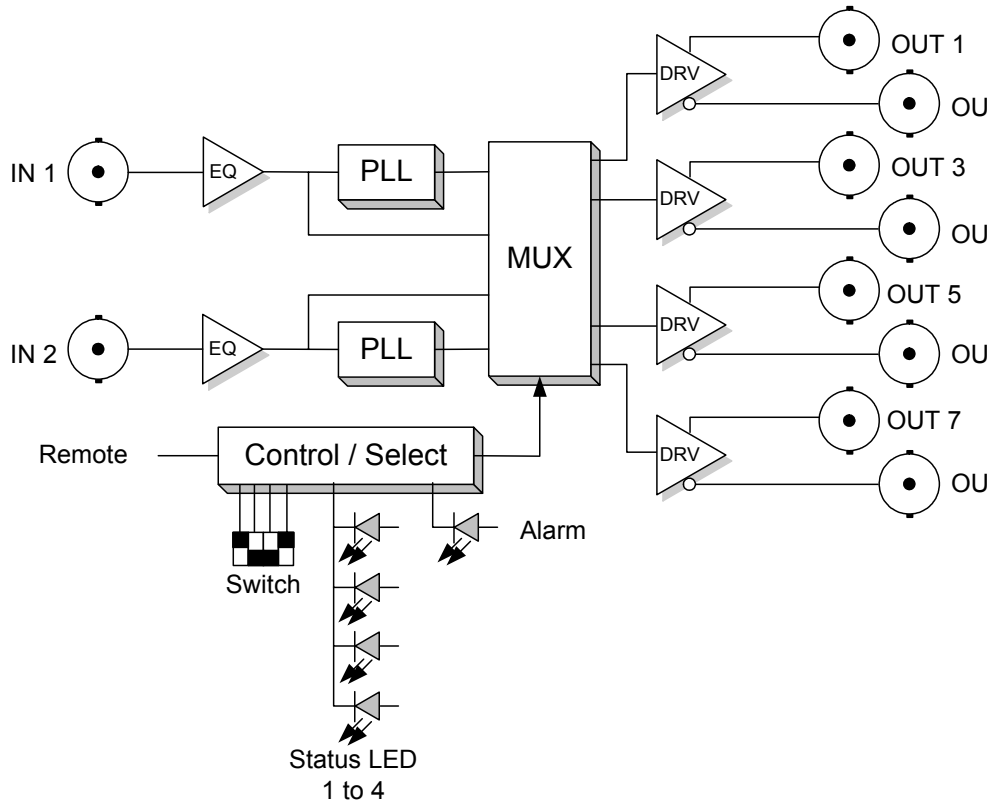


Figure 1- D VD 3020 Functional Diagram

## Module Layout

Figure 2 shows the physical layout of the D VD 3020 MiniModule. Video I/O is made through standard BNC video connectors. Module configuration is set via a small dip-switch located behind a small access hole in the bottom of the module.

When used in single mode (1x1:8) **IN 2** is used as the input signal.

If the module is being used in a stand alone application then the optional power supply (R PS 3001 E, R PS 3001 U or R PS 3001-3) is required to power the module (not shown)



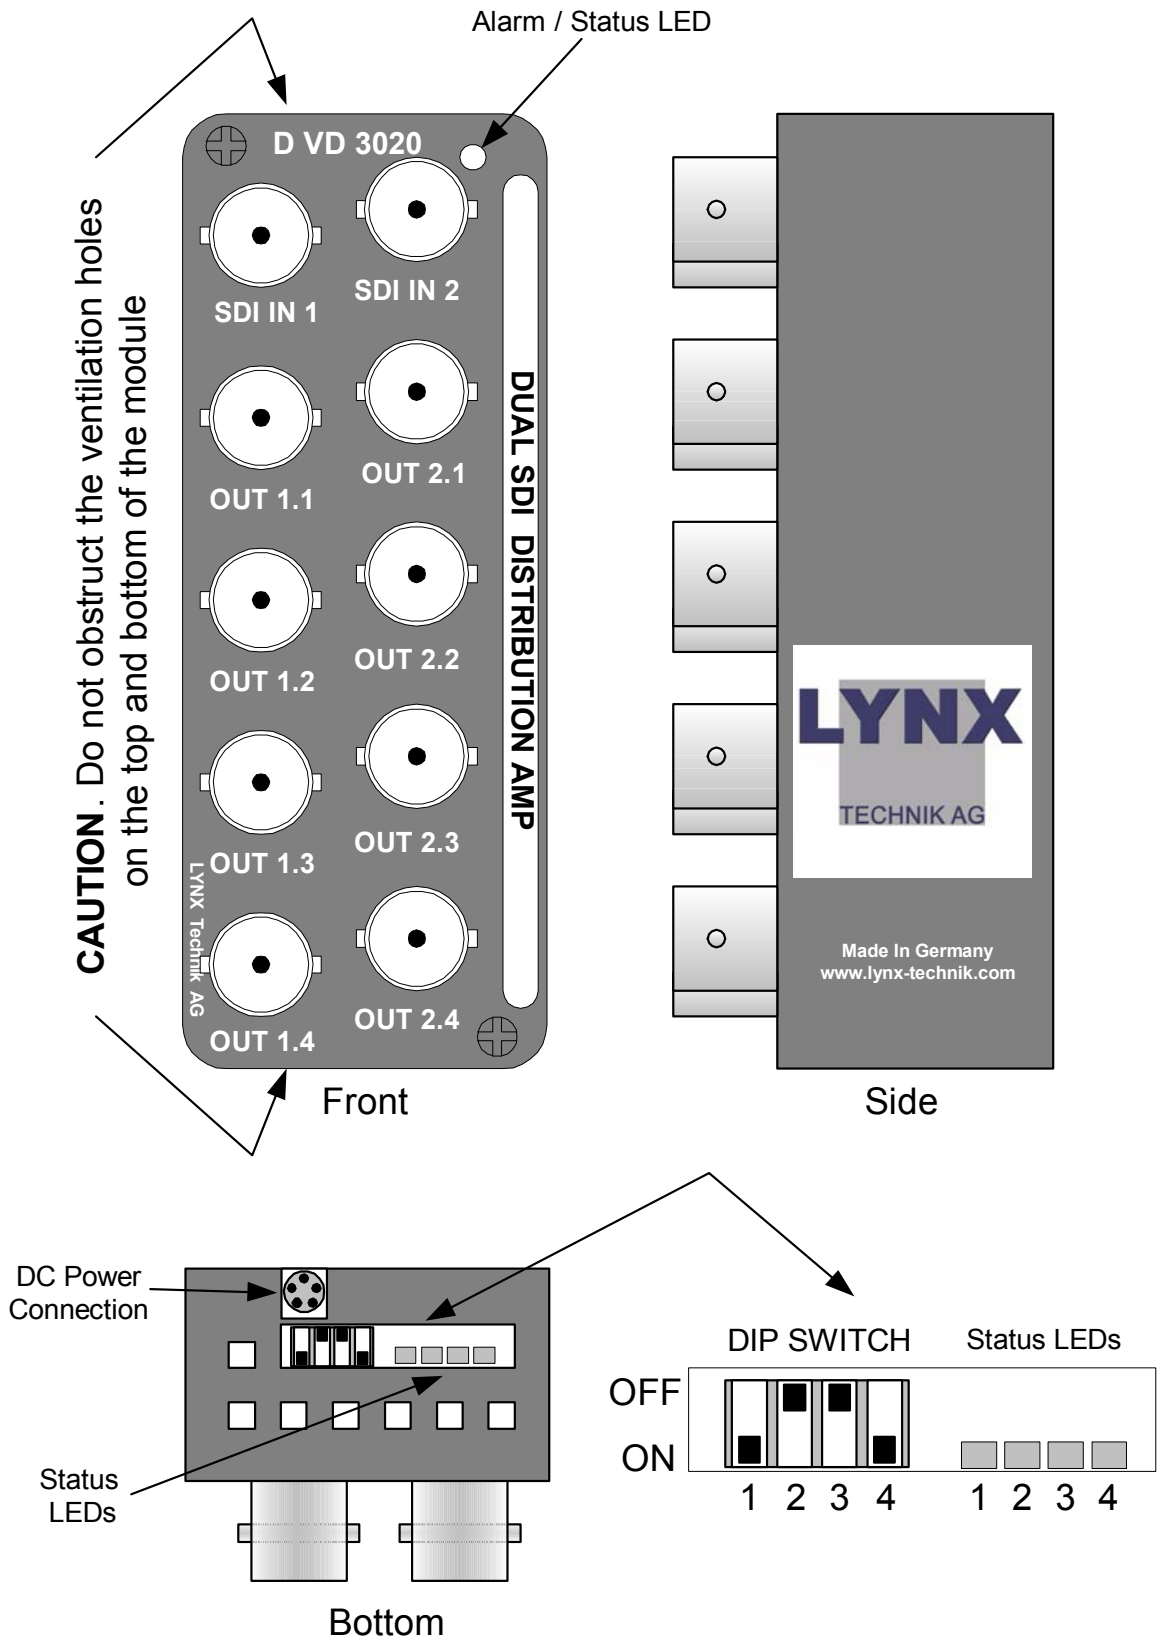


Figure 2 – Module Layout

# Connections

## Video Connections

The D VD3020 MiniModule is configured with standard 75 Ohm BNC connectors. Connection is self-explanatory. We recommend the use of high quality video cable for digital video connections to reduce the risk of interference or errors due to excessive cable attenuation. Some guidelines for max cable length are shown below.

250m (820 feet) Belden 8281 (270Mbits/s)

150m (492 feet) Belden 8281 (540Mbits/s)


**Note.** Due to the compact design of the module it will be necessary to use a connection tool to secure the BNC video connectors to the module.

## Power Connections

If using the module in a stand-alone application use the separate R PS 1 E (for Europe), R PS 1 U (USA) power brick option or the desk power supply R PS 3001-3.

### DC Power Connector

The MiniModule has a captive power lead fitted to the module, with a male 5 pin locking bayonet connector. This connection provides DC power and also data connectivity to the module. Connector wiring is shown below.

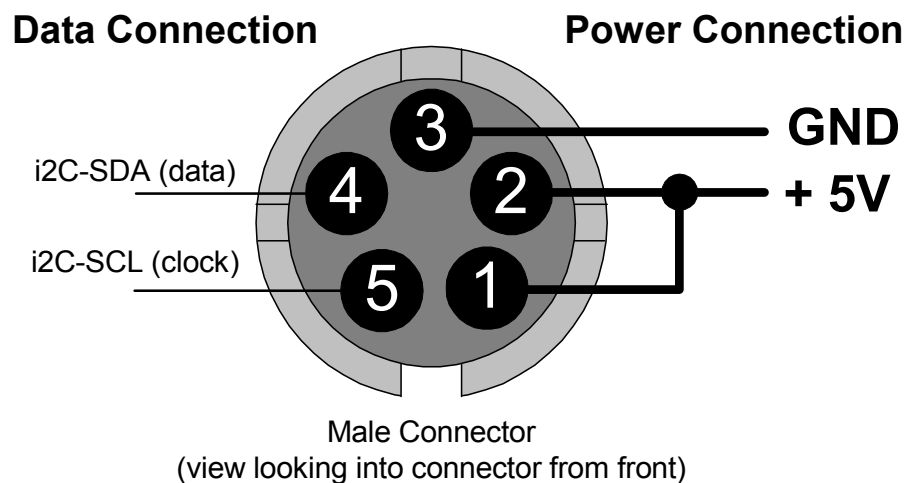

### Caution

Only use the optional LYNX R PS power modules. Ensure the 5-pin power connector is locked securely in place.

# Installation

## Mechanical

### Stand Alone Operation

The D VD 3020 MiniModule can be used in a stand alone application. There are two options for the use of the module in this way.

- a) Using the R FR 3005 Rack Frame 1 option. This allows up to any 10 of the MiniModules to be secured onto a rack frame assembly for 19 inch rack mounting. This keeps the modules secured, organized and out of the way. The R PS 3001 power brick option or the R FR 3010 option is required to power each module. Please refer to the R FR 3005 Reference Manual supplied with this option for more details.
- b) Single Use. The MiniModule can be powered independently with the R PS 3001 option and used in any location where this functionality is required.



**Caution.** Care needs to be taken when using the module in this way, as it is not physically secured. Keep the module away from the floor to avoid the risk of someone stepping or tripping on the unit, and locate the unit away from excessive sources of heat and any sources or moisture.

*If using more than one MiniModule in any installation, the R FR 3005/3010 Rack frame combination is highly recommended.*

## Multiple Units

Most applications will require more than one MiniModule, which can include any of the available Series 3000 MiniModule product range. There are two options for mounting multiple units.

- a) Using the R FR 3005 Rack Frame option. This allows up to any 10 of the MiniModules to be secured onto a rack frame assembly for 19 inch rack mounting. The R PS 3001 power brick option or the R FR 3010 option is required to power each module. Please refer to the R FR 3005 Reference Manual for more details.
  
- b) Using the R FR 3010 Rack frame extension option. Can be combined with the R FR 3005 Rack frame option. Each module plugs into a connection bus, which provides common power for all modules. (no R PS external power supplies are needed). Remote control and status monitoring of all modules is possible with the addition of the R CT 5020 rack controller and R CT 5030 master controller options. Please refer to the respective reference manuals for these options for details of mechanical installation.

The very small size and density of the MiniModules combined with the available rack frame options allows the addition of a complex and custom signal distribution system without taking any additional front rack space. The rack frames are designed for installation in the back of 19-inch racks where there is normally plenty of available space. Ideal for mobile truck installations and facility expansions where space is at a premium.

# Electrical Installation.

## Stand Alone Operation

The MiniModule requires the R PS 3001 power brick option for stand-alone operation. Three versions are available: R PS 3001 E for European markets, R PS 3001 U for the US markets or the desk power supply R PS 3001-3. Please ensure you have the correct power option for your region. The connection to the module is made with a small 5-pin connector, which has a twist bayonet securing system. Please make sure the connection is solid and locked in place. A strain relief is included within the module to prevent excessive strain on the connection.

Signal connections should be made with care, please ensure connections are correct and compatible equipment is feeding / receiving the signals from the module or damage can result.



**Caution.** Only use the optional Lynx R PS 1 power modules. Ensure the 5-pin power connector is locked securely in place.



**Caution.** Care needs to be taken when using the module in this way, if it is not physically secured. Keep the module away from the floor to avoid the risk of someone stepping or tripping on the unit, and locate the unit away from excessive sources of heat and any sources or moisture.

## Multiple Units


When installing multiple MiniModule units it is recommended you use the R FR 3005 Rack Frame 1 and / or R FR 3010 Rack Frame 2 options. Please refer to the documentation supplied with these options for details on electrical installation.

## Settings and Control

The D VD 3020 has an integrated micro-controller, which enables the module to be configured and controlled locally via the integral dip-switch, or from remote when using the optional R FR 3010 Rack Frame and control system.

Once set, all settings are automatically saved in non-volatile internal memory. The module will always recall the settings used to prior to power off.

The D VD 3020 is configured locally via the integral 4-position dip-switch.

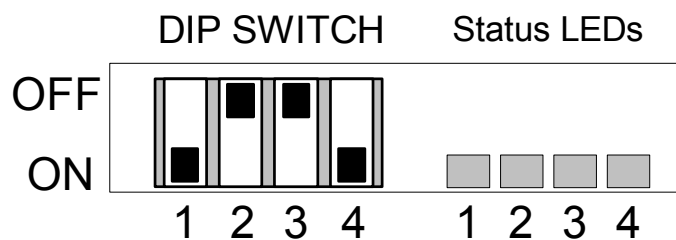

## Switch Settings

Below the switch settings for the 4-position dip-switch are defined.

Switch	Setting	Function
1	ON	Enable Local Adjustment
	OFF	Disable Local Adjustment
2	ON	Dual 1:4 mode
	OFF	Single 1:8 mode *
3	ON	Outputs 1 to 4 Reclocked
	OFF	Outputs 1 to 4 Non-reclocked
4	ON	Outputs 5 to 8 Reclocked
	OFF	Outputs 5 to 8 Non-reclocked

\*When in single mode the **IN 2** video input is used

Basically, the module can operate in six different configurations:

- 1 x 1:8**            **IN 2 is distributed to 8 reclocked outputs.**
- 1 x 1:8**            **IN 2 is distributed to 8 non-reclocked outputs.**
- 1 x 1:8**            **IN 2 is distributed to 4 reclocked and 4 non-reclocked outputs.**
- 2 x 1:4**            **Both inputs are distributed to 4 reclocked outputs each.**
- 2 x 1:4**            **Both inputs are distributed to 4 non-reclocked outputs each.**
- 2 x 1:4**            **One input is distributed to 4 non-reclocked outputs and one input is distributed 4 reclocked outputs**



## Switch Function Detail

### Dip Switch 1

This switch is used to enable or disable local adjustments. Set to **ON** enables the setting of the other dip switches to configure the module. Set to **OFF** will prevent any switch settings taking effect.

**Note.** The module has a microcontroller and flash ram. When this switch 1 is set to **ON** any configuration settings made on the module with the dip switches will automatically be written into flash ram and stored. (see Auto Store) The module will function normally with the switch left in the **ON** position but it is recommended to set it to **OFF** to prevent accidental changes to the stored module configuration if the switches are moved.

### Dip Switch 2

When set to **ON** this configures the module for dual 1:4 mode of operation, **OFF** sets single 1:8 mode.

**Note** when in 1:8 mode **IN 2** is used for the single input channel.

### Dip Switch 3

This switch configures outputs 1 to 4 to be reclocked or non reclocked. **ON** sets reclocked **OFF** sets non-reclocked

### Dip Switch 4

This switch configures outputs 5 to 8 to be reclocked or non reclocked. **ON** sets reclocked **OFF** sets non-reclocked

## Factory Preset Condition

The D VD 3020 is delivered preset for the following mode of operation:

Mode	<b>2 x 1:4</b>
Outputs 1-4	<b>Reclocked</b>
Outputs 5-8	<b>Reclocked</b>

If this is the mode of operation required, then no adjustments are necessary.

# Alarm/LED Status Indicators

The D VD 3020 module has built in LED indicators, which serve as alarm and status indication for the module. Function is described below.

The Indicators are found on the bottom of the module and can be seen through the access hole provided. (Figure 2)

## Channel Condition Indicators

Four status LEDs are provided on the module edge and can be seen through the access hole (figure 2)

LED number	Indication
1	ON = Input 1 present
2	ON = Input 1 PLL lock
3	ON = Input 2 present
4	ON = Input 2 PLL lock

## Front Panel Alarm Indicator

There is also a single alarm LED on the front side of the module, which is designed for quick and easy indication of a problem condition in installations where visible access to the bottom of the module is not convenient.

LED Color	Indication
Green	Signal Present (locked)
Yellow	When in dual mode (2 x 1:4) this indicates only one input signal is present
Red	Input signal lost

LED **OFF** indicates power is lost, or there is a power supply fault.

## **Locate Function**

For large systems which have many modules in various locations we have added a utility which will help visually identify a module quickly. (When used in conjunction with the optional control system and software)

Once the module has been identified on the control system it is possible to initiate the "locate" function and flash the module front LED yellow in the following continuous sequence.

3 short flashes.... Pause.... 3 short flashes ...

This uses the alarm LED located on the front of the module as well as any module edge LEDs (green) that may be used in the module.

Use of the locate function will not interfere with the normal operation of the module.

For more details on this feature please check the documentation supplied with the controller software

## **Auto Store**

If no parameters are changed for 10 seconds then the current settings will be written into flash memory automatically, this can be seen by the front LED flashing yellow, the module edge LEDs flashing green four times.

# Specifications (D VD3020)

## Inputs

Signal	1 or 2 Serial Digital Video. SMPTE 259M-C
Input Impedance	75 Ohms
Input level	0.8V p-p
Return loss	> 15dB (270MHz)
Connection	BNC

## Outputs

Signal	8 Serial Digital Video. SMPTE 259M-C
Output Impedance	75 Ohms
Output Level	0.8V p-p
Return loss	> 15dB (500MHz)
Connection	BNC

## Operating Modes

Dual	2 x 1:4 (reclocked or non clocked)
Single	1 x 1:8 (reclocked or non clocked)

## Performance

Cable Equalization	Up to 250M using Belden 8281 (270Mbit/s)
Jitter	< 0.2 UI
Control	Local settings (dip switch).
Status Monitoring (LED)	Signal presence and PLL lock indication

## Electrical Specifications

Operating Voltage	+ 5VDC
Power Consumption	3.5 VA
Connection	DC input via 5 pin locking bayonet connector
Safety	IEC 60950/ EN 60950/VDE 0805

## Mechanical

Size	85.5mm x 35.3mm x 27mm + connectors
Weight	150g

## Ambient

Temperature	5°C to 35°C Maintaining specifications
Humidity	Max 80% non condensing

## Supplied Accessories

Documentation	D VD 3020 Reference Manual and Quick Ref guide
---------------	--

## Available Options

Below is a list of available options for the D VD 3020 MiniModule. Please refer to product brochures or our web site for more detailed information.

<b>Model</b>	<b>Description</b>
<b>R PS 3001 E</b>	<b>External brick power supply module for Series 3000 MiniModules. European market version. 100-240 VAC input, +5V DC output.</b>
<b>R PS 3001 U</b>	<b>External brick power supply module for Series 3000 MiniModules. USA market version. 110-240 VAC input, +5V DC output.</b>
<b>R PS 3001-3</b>	<b>External desk power supply module for Series 3000 MiniModules. 110-240 VAC input, +5V DC output.</b>
<b>R FR 3004</b>	<b>Mounting Support for 4 MiniModules</b>
<b>R FR 3005</b>	<b>Rack Frame 1. This is a basic 19 inch rack mountable frame which can accommodate 10 MiniModules with power bricks R PS 1 or can be extended with the R FR 3010.</b>
<b>R FR 3010</b>	<b>Rack Frame 2. This is a card cage with integrated central power supply, optional redundant power supply and optional controller, which can accommodate 10 MiniModules. Can be combined with R FR 3005</b>
<b>R PS C15</b>	<b>1.5m cable extension to connect one MiniModule to R FR 3010</b>
<b>R PS C25</b>	<b>2.5m cable extension to connect one MiniModule to R FR 3010</b>
<b>R PS 3010</b>	<b>Redundant power supply for the R FR 3010 card cage</b>
<b>R CT 5020</b>	<b>Rack controller for the R FR 3010 rack frame</b>
<b>R CT 5010</b>	<b>Rack Bus Extension for R FR 3010 rack frame. In combination with R CT 5020</b>
<b>R CT 3000</b>	<b>Service Adapter for remote configuration of one MiniModule via PC or Palm</b>

## Parts List

Due to the very dense design and high level of integration there are no user serviceable electronic assemblies within the D VD 3020 module.

### **D VD 3020 Mini Module (complete)**

Description	Dist Amp Dig Video
Model Number	D VD 3020
Part Number	6.155.001.290

## Service

If you are experiencing problems, or have questions concerning your D VD 3020 MiniModule please contact your local distributor for assistance.

We offer a fixed cost service exchange program for defective Series 3000 MiniModules out of Warranty. Please contact your distributor or check our web site for details on this program.

More detailed information and product updates may be available on our web site:

**[www.lynx-technik.com](http://www.lynx-technik.com)**

You will also find links to contact us directly for assistance.

## Contact Information

Please contact your local distributor; this is your local and fastest method for obtaining support and sales information.

LYNX Technik can be contacted directly using the information below.

<b>Address</b>	LYNX Technik AG Brunnenweg 3 64331 Weiterstadt Germany.
<b>Website</b>	<a href="http://www.lynx-technik.com">www.lynx-technik.com</a>
<b>E-Mail</b>	<a href="mailto:info@lynx-technik.com">info@lynx-technik.com</a>

LYNX Technik manufactures a complete range of high quality modular products for broadcast and Professional markets, please contact your local representative or visit our web site for more product information.



This Page is intentionally left blank



