


3Gbit SDI to Fiber Optic Receiver

- Supports SDI video inputs up to 3Gbit/s (1080p60)
- 3Gbit Level A and Level B support (all formats)
- Auto relocking 270Mbit / 1.5Gbit / 3Gbit
- 2 x SDI outputs
- Versions for LC, ST or SC fiber connections
- Multimode version available
- Input range 1260nm to 1620nm (singlemode)
- Input range 780nm to 880nm (multimode)
- Supports hot swapping and hot plugging



ORX 1802-2 LC Version Shown

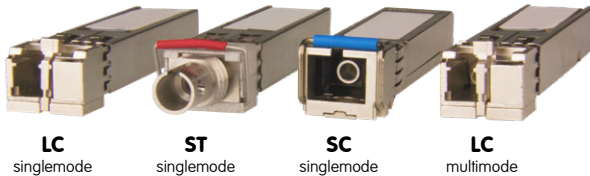

Using the same basic module we provide four versions suitable for LC, ST or SC singlemode fiber connections, as well as a version for multimode fiber. Each version has a different SFP installed.

The ORX 1802-2 is a compact fiber to SDI receiver designed to combat the restrictions involved with the distribution of uncompressed broadcast quality video signals over long distances.

When paired with the fiber optic to SDI transmitters (e.g. yellobrik OTX 1812 or OTX 1842) you have a very cost-effective optical transmission / receiver system for signals up to 1080p60 (3Gbit/s), while preserving full uncompressed quality.

The OTX 1812 provides 2 SDI outputs and support for LC, ST or SC singlemode fiber connections as well as an LC version suitable for multimode fiber.

The ORX 1802-2 will auto-detect and re-clock any 270Mbit / 1.5Gbit and 3Gbit SDI fiber source and convert to an electrical signal. The module is fully compatible with 3Gbit Level A and Level B formats.

Technical Specifications

Fiber Input singlemode	1 x fiber optic Input LC, ST or SC connection
	SMPT E 297M - 2006
	Input range (wavelength) 1260nm to 1620nm
	RX sensitivity -3dBm to -18dBm
	RX active LED on side of module
Fiber Input multimode	1 x Fiber Optic Input LC Connection
	SMPT E 297M - 2006
	Input range (wavelength) 780nm to 880nm
	RX sensitivity 0dBm to -15dBm
	RX active LED on side of module
SDI Output	2 x SDI video on 75 Ohm BNC connectors
	SMPT E 424M, SMPT E 292M, SMPT E 259M, DVB-ASI
	Multi-standard operation from 270Mbit/s to 3Gbit/s
	Electrical Return Loss: >15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz
Power	+12VDC @ 1.3W nominal - (supports 7 - 16VDC input range)
Physical	Size: 140mm x 42mm x 22mm (5.51" x 1.65" x 0.86") including connectors Weight: 125g (4.4oz)
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
Model #	ORX 1802-2 LC - (EAN# 4250479359697) ORX 1802-2 ST - (EAN# 4250479359710) ORX 1802-2 SC - (EAN# 4250479359703) ORX 1802-2 MM (Multimode) - (EAN# 4250479359727)
Includes	Module, AC power supply

Power Adapter Options

The kit **INCLUDES** AC power supplies. The power adapters below are optional.



P-TAP 1000

Use with a standard battery P-TAP power source.



XLR 1000

Use with a standard 4 pin XLR camera battery power source.

Specifications subject to change