

8k Fiber Transmission System

- Support for 4 independent 12G/6G/3G/1.5G/270M channels
- Transport 8k (uncompressed) singals up to 10km* (6.2miles)
- Each channel supports resolutions up to 2160p/60Hz
- Each channel individually reclocked
- Embedded audio / metadata support for each channel
- Integrated expansion port to add more channels
- LED indicators for channel activity and power
- Kit includes transmitter, receiver and power supplies
- Optional 19" Rack tray to mount up to 4 modules



The OTR 1A42 is a self contained fiber transmission kit for the transport of four discreet 12G SDI signals (or 8k/48G uncompressed) over a single fiber link. The kit includes the fiber transmitter, fiber receiver and power supplies. This is an ideal solution for the transmission of multiple uncompressed SDI streams up to 12G.

Each SDI channel is fully independent. For 8k use, the signal is split over four separate 12G SDI links (48G) and supports full 8k resolution at 60fps. The system can also be used for any combination of SDI signals, with a mix of formats and bit-rates if required. Each channel will automatically detect and reclock SDI bit rates of 270Mbit/s, 1.5Gbit/s, 3Gbit/s, 6Gbit/s and 12Gbit/s.


LED Indicators are provided for channel presence and power. An optional 19" rack mount tray is available which can accommodate up to four modules (RFR 1018).

Note: Internal CWDM optical multiplexing is utilized within the modules. This kit should be considered a self contained point to point solution and should not be integrated into external CWDM systems.

Application Example

4 x SDI (8k/48G) Fiber Transport

This basic configuration is used for transporting up to four discreet SDI signals (SD/HD/3G/6G/12G) or it can be used for transporting an 8k (48G) signal over fiber.

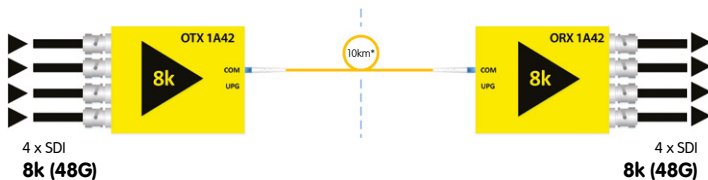

Rack Mount Options

RFR 1018

19" Rack frame to mount up to 4 modules. No tools required, modules are clipped securely in place.



Technical Specifications

SDI Video

4 x SDI inputs on 75 Ohm BNC connections (OTX 1A42)

4 x SDI outputs on 75 Ohm BNC connections (ORX 1A42)

SMPTM 259M-2008 , SMPTM 292-1:2012, SMPTM 292-2:2011

SMPTM 424M-2006 , SMPTM ST-2081, SMPTM ST-2082

Multi-standard / Multi-format operation auto-detect.

Multi-rate reclocking: 270Mbit/s - 1.5Gbit/s - 3Gbit/s - 12Gbit/s

Electrical Return Loss: to 1.5GHz >15dB to 3GHz >10dB to 6GHz >7dB to 12GHz >4dB

Automatic cable EQ	270Mbit/s	1.5Gbit/s	3Gbit/s	12Gbit/s
	250m	190m	140m	80m

Belden 1694A	Belden 4794R
--------------	--------------

Fiber Optics

1 x Fiber optic I/O port (COM port)

1 x Fiber optic expansion port (UPG port)

Duplex (singlemode) LC/PC connections

SMPTM 297M - 2006

Internal CWDM Multiplexing

Wavelengths 1350nm, 1370nm, 1390nm, 1410nm

Optical budget 10.6dB

Max. Distance* 10km (6.2 miles)

Fiber activity LEDs for each channel

Power

+12V DC - (Supports input range 7 - 24 V DC)

OTX 1A42: 5.4W | ORX 1A42: 4.4W

2x Power LEDs on side per module

Physical (per module)

Size 170 x 99.7 x 40.5mm

(incl. connectors) (6.7" x 3.9" x 1.6)

Weight: 600g (21.1oz)

Ambient

5 - 40°C (41 - 104°F) 90% Humidity (non condensing)

Model

OTR 1A42 EAN# 4250479328624

Includes

2 Modules, 2 Power Supplies


*Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of cable. Determine link losses and perform optical budget calculations to ensure correct operation.



Applications


4 x 12G SDI (8k/48G) Fiber Transport

This basic configuration is used for transporting up to four discreet 12G SDI signals (SD/HD/3G/6G/12G) or it can be used for transporting an 8k (48G) signal over fiber.

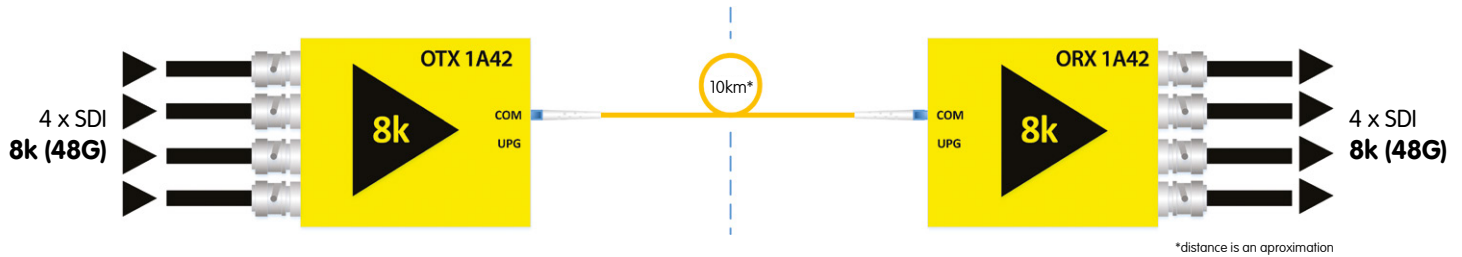


4 x 12G SDI (8k/48G) Fiber Transport + Ethernet

This configuration transports four discreet 12G SDI signals (SD/HD/3G/6G/12G) or 8k (48G) and also adds bidirectional Ethernet from the OBD 1510 E into the same fiber link using the UPG expansion port. **Note: Total distance is reduced to 5km when used in this configuration.**

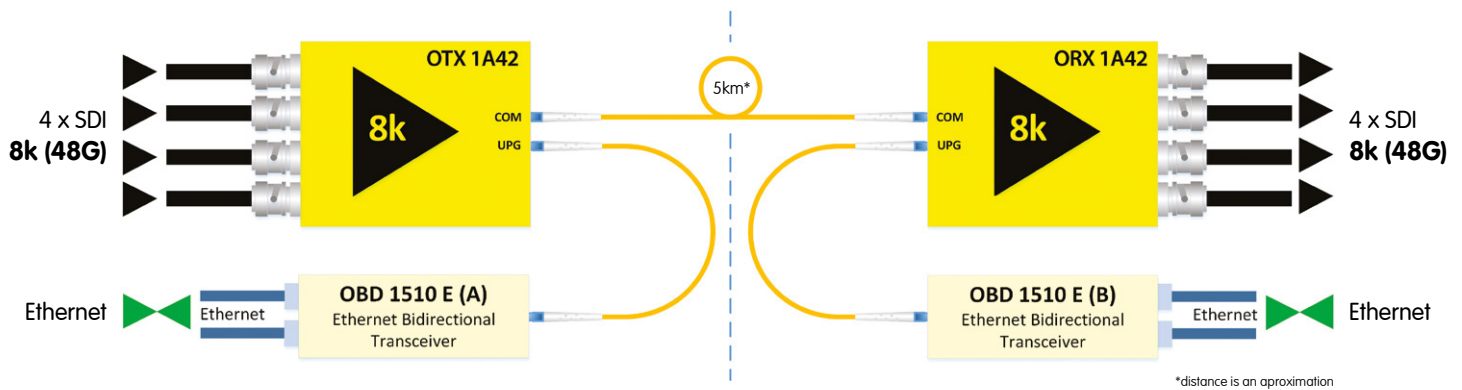

4 x 12G SDI (8k/48G) Fiber Transport + Serial RS 232 + GPI

This configuration transports four discreet 12G SDI signals (SD/HD/3G/6G/12G) or 8k (48G) and also adds bidirectional Serial data (RS232/422/485) + GPI from the OBD 1510 D into the same fiber link using the UPG expansion port. **Note: Total distance is reduced to 5km when used in this configuration.**

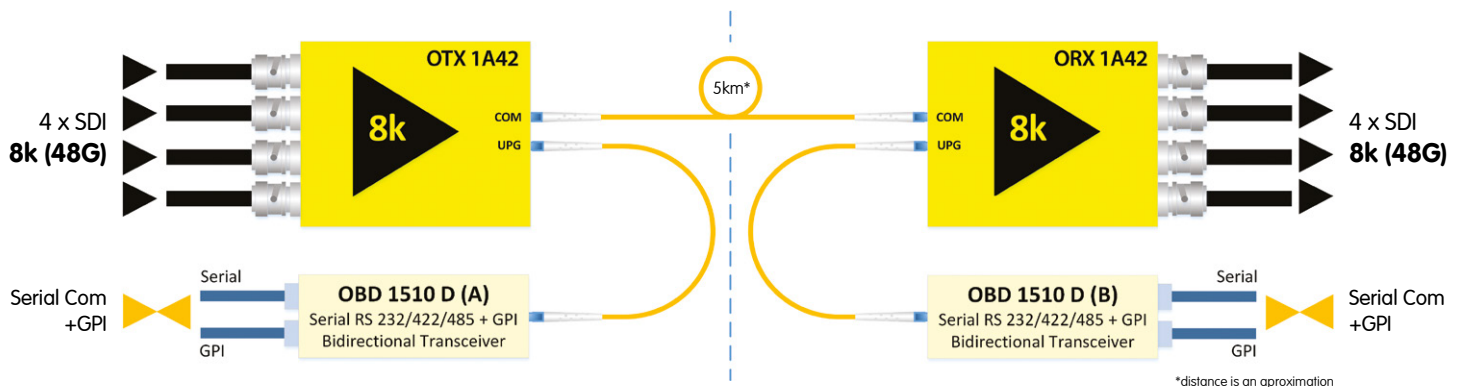

8 x 12G SDI (16k 96G) Uncompressed Fiber Transport and 8k Bidirectional Fiber Transport

Connecting the OTR 1A41 into the expansion port will add 4 more 12G SDI channels to the system which will enable the transport of uncompressed 96Gbit/s over a single fiber link. It is also possible to have 8k (48G) uncompressed bidirectional fiber transport over a single fiber link. Please refer to the product information for the OTR 1A41 for diagrams of these configurations.

