

fiber options


OH-TT-12G-XXXX-XXXX-Y Fiber SFP Data Sheet

Dual Channel 12Gbit SDI Optical Transmitter - CWDM

- Dual channel SDI multi-rate optical transmitter for 12G-SDI, 6G-SDI, 3G-SDI, and HD-SDI signals
- Support for SMPTE 2082, SMPTE 2081, SMPTE 424M, and SMPTE 292M
- 18-wavelengths (9 pair) selections according to ITU-T G694.2
- Distances up to 10km** (singlemode)
- For use with yellobrik, greenMachine, and Series 5000 product lines
- Pluggable and hot swappable
- LC Duplex connector - singlemode
- Lead free and RoHS compliant

The **OH-TT-12G-XXXX-XXXX-Y** dual channel SDI optical transmitter is a CWDM fiber plug in option for selected LYNX Technik yellobrik, greenMachine, and Series 5000 products. This SFP module facilitates the conversion of two electrical SDI signals into optical signals for transmission over two fiber links. 18-wavelengths (9 pairs) selections are available for CWDM applications and support for distances of up to 10km** is provided. The module accomodates 11.88Gbit, 5.94Gbit, 2.97Gbit, and 1.485Gbit SDI signals conforming to SMPTE 2082, SMPTE 2081, SMPTE 424M, and SMPTE 292M.

A socket, or "cage" is provided for the SFP in the supporting LYNX product for easy installation or upgrade. The SFP is hot swappable.

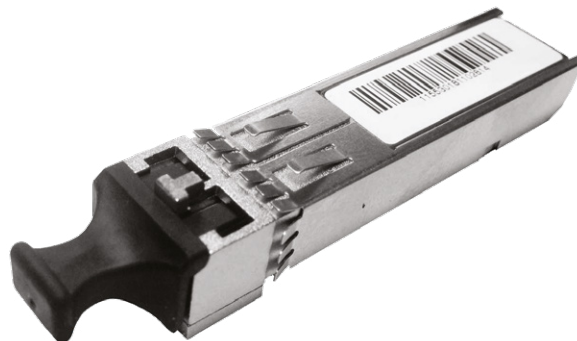

Shown with dust cap fitted

Specifications (each channel)

Parameter	Min	Typ	Max
Wavelengths [18 according to ITU-T G694.2]	$\lambda - 10\text{nm}$	λ	$\lambda + 10\text{nm}$
Optical Power	-2dBm	-	+3dBm
Distance	-	10km**	-
Linear Extinction Ratio	3.5	-	-
Operating Temperature Range	5°C	-	40°C
Power Supply Voltage	3.1 VDC	3.3 VDC	3.5VDC
Power Consumption	-	250 mA	300 mA
Humidity (non condensing)	-	-	90%

$\lambda =$ [1270 + 1290], [1310 + 1330], [1350 + 1370], [1390 + 1410], [1430 + 1450], [1470 + 1490], [1510 + 1530], [1550 + 1570], [1590 + 1610] nm

Mechanical

Parameter	
Size (not including connector - typ)	57mm x 13.4mm x 12.4mm
Weight	50g
SFP Connector pinning	MSA
Fiber connections	LC / Duplex - singlemode

Country of manufacture: Taiwan

Ordering Information

EAN / UPC	Model	Description
4250479327337	OH-TT-12G-1270-1290-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable -10km - 1270&1290nm - Fiber LC connectors
4250479327344	OH-TT-12G-1310-1330-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1310&1330nm - Fiber LC connectors
4250479327351	OH-TT-12G-1350-1370-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable -10km - 1350&1370nm - Fiber LC connectors
4250479327368	OH-TT-12G-1390-1410-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1390&1410nm - Fiber LC connectors
4250479327375	OH-TT-12G-1430-1450-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable -10km - 1430&1450nm - Fiber LC connectors
4250479327382	OH-TT-12G-1470-1490-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1470&1490nm - Fiber LC connectors
4250479327399	OH-TT-12G-1510-1530-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1510&1530nm - Fiber LC connectors
4250479327405	OH-TT-12G-1550-1570-Y	Dual 12G SDI Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1550&1570nm - Fiber LC connectors
4250479327412	OH-TT-12G-1590-1610-Y	Dual Optical Transmitter (TT) SFP Module - CWDM capable - 10km - 1590&1610nm - Fiber LC connectors

** Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of fiber cable and accumulated optical losses in the fiber link. Determine link losses and perform optical budget calculations to ensure correct operation.

WARNING

These SFP modules are Class 1 laser devices which comply to IEC825 and FDA 21 CFR 1040.10 and 1040.11. The device must be operated within specified temperature and voltage limits. The optical ports of the module must always be terminated with an optical connector or a dust plug (dust plug supplied)



Rev 1.0 Specifications subject to change

LYNXTechnik AG

www.lynx-technik.com

LYNX Technik AG
Brunnenweg 3
D-64331 Weiterstadt
Germany
PH +49 (0) 6150 1817 0
info@lynx-technik.com

LYNX Technik Inc
26366 Ruefher Ave.
Santa Clarita, CA 91350
USA
PH +1 (661) 251 8600
infousa@lynx-technik.com

LYNX Technik Pte Ltd
114 Lavender street
#05-92 CTHub2
Singapore 338729
PH +65 6702 5277
infoasia@lynx-technik.com