



yellobrik®

yellobrik®

Quick Reference

Technical Specifications


SDI Video	1 x SDI video input 1 x SDI Video output 75 Ohm BNC connectors
	SMPTE 424M, SMPTE 292M, SMPTE 259M, DVB-ASI
	Multi-standard operation from 270Mbit/s to 3Gbit/s
Fiber Optic	Multi-rate reclocking 270Mbit/s - 1.48Gbit/s - 3Gbit/s
	Return Loss: > 15dB to 1.5GHz and > 10dB up to 3GHz
	Automatic cable EQ (Belden 1694A cable) 250m @ 270Mbit/s, 140m @ 1.5Gbit/s, 80m @ 3Gbit/s
Power	1 x fiber optic input (Range 1260-1620nm, Sensitivity -3dBm to -19dBm)
	1 x fiber optic output (CWDM - 18 selectable wavelengths - ITU-T G.694.2) Duplex (Singlemode) using LC/PC Connections
	SMPTE 297M - 2006
	Hot pluggable
Power	TX active LED, and RX active on side of module
	Single mode transmit / receive (duplex connector)
	Max. distance approx. 40km (24.8 miles) @ 3Gbit/s (Singlemode)
Power	+12VDC @ 1.9W nominal without SFP
	+12VDC @ 2.7W nominal with SFP (supports 7 - 16VDC input range)

We are constantly adding additional yellobrik modules. Please visit our website for the latest product updates.

www.lynx-technik.com

OTR 1840-1

3Gbit HDSDI / Fiber Optic Transceiver (CWDM)

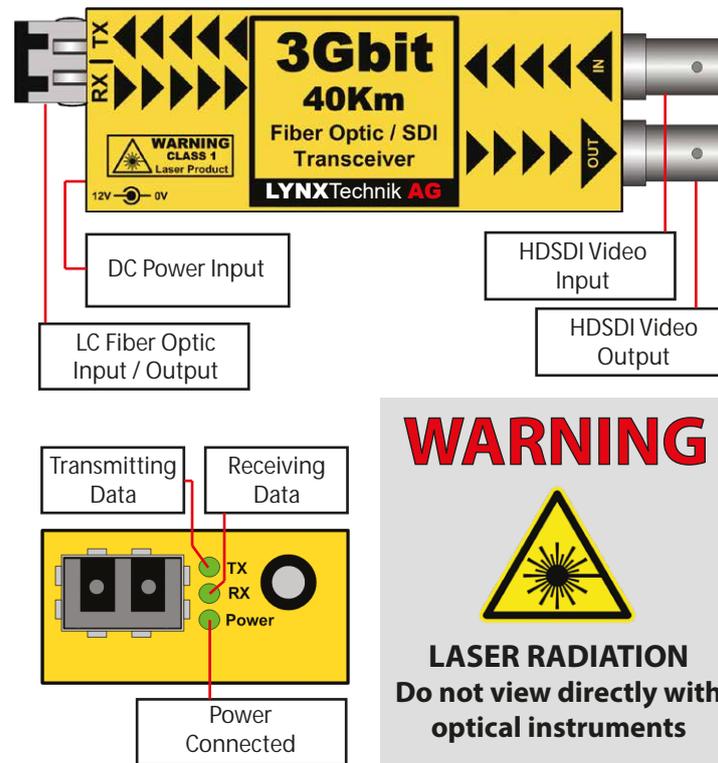

WARNING



LASER RADIATION
Do not view directly with
optical instruments

CLASS 1M LASER PRODUCT

LYNXTechnik AG®

Broadcast Television Equipment

Connections

The SDI video input and output is connected to the corresponding 75 Ohm BNC connections provided (up to 3Gbit). The fiber connections are made to the LC connector as indicated on the module. The connection is LC Duplex (single mode). An example of a single LC connector shown below, one is required for the input and output connection.



Operation

The OTR 1840-1 combines a CWDM fiber optic transmitter and receiver into a single package. Different video formats can be transmitted and received. Operation of the receiver and transmitter is automatic. For transmission, the Input video format is automatically detected and the video signal is relocked and then transmitted over the fiber optic connection. For reception, the received SDI format is detected automatically and provided on the HDSDI output connection

The OTR 1840-1 supports any SDI video signal from 270Mbit/s to 3Gbit/s. Max distance is 40 Km (24.8 miles). Data send and receive activity is indicated by the LEDs located on the side of the module. The module supports hot swapping and hot plugging of connections.


This is a CWDM module and there are 18 different wavelength selections for the fiber transceiver SFP. Wavelength selections are according to ITU-T G 694.2

Power

The module requires a 12V DC power input and a LED is provided to confirm power is connected. A power supply is provided, but if applying your own power, please provide a clean 12V DC power source. Module power consumption is approx 250mA (2.8VA)

Power Lead Strain Relief

The module has a small hole in the case located above the power connection to prevent the power lead being accidentally pulled out. Use the supplied tie-wrap and secure the lead as shown below.

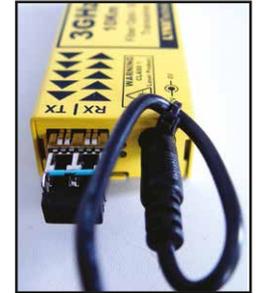

Optional Mounting Bracket

The optional RFR 1001 mounting bracket can be used to permanently mount the module on any flat surface or on 19" rack rails.



Note: OTR 1840-1 is identical in terms of mounting and securing.