



Version 1.4

Reference Manual

P VD 5005 G Video Media Processor

(Frame Synch with Audio Processing for embedded Audio)

Series 5000
CardModule

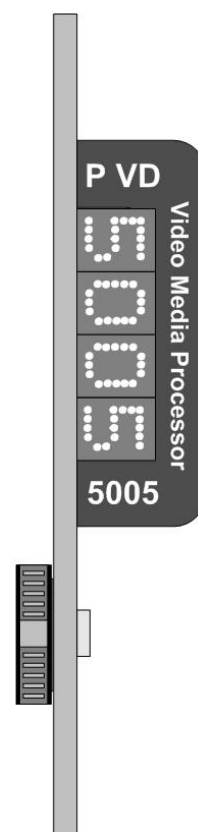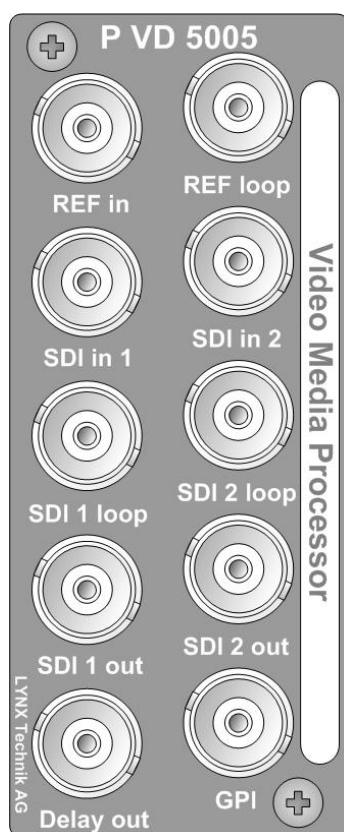

© LYNX Technik AG
Brunnenweg 3
D-64331 Weiterstadt
Germany
www.lynx-technik.com

Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, without express written permission of LYNX Technik AG.

LYNX Technik AG may have patents, patent applications, trademarks, copyrights or other intellectual property rights covering the subject matter in this document. Except as expressly written by LYNX Technik AG, the furnishing of this document does not give you any license to patents, trademarks, copyrights or other intellectual property of LYNX Technik AG or any of its affiliates.

© LYNX Technik AG 2004 all rights reserved

Warranty

LYNX Technik AG warrants that the product will be free from defects in materials and workmanship for a period of two (2) year from the date of shipment. If this product proves defective during the warranty period, LYNX Technik AG at its option will either repair the defective product without charge for parts and labor, or will provide a replacement in exchange for the defective product.

In order to obtain service under this warranty, customer must notify LYNX Technik of the defect before expiration of the warranty period and make suitable arrangements for the performance of service. Customer shall be responsible for packaging and shipping the defective product to the service center designated by LYNX Technik, with shipping charges prepaid. LYNX Technik shall pay for the return of the product to the customer if the shipment is within the country which the LYNX Technik service center is located. Customer shall be responsible for payment of all shipping charges, duties, taxes and any other charges for products returned to any other locations.


This warranty shall not apply to any defect, failure, or damage caused by improper use or improper or inadequate maintenance and care. LYNX Technik shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than LYNX Technik representatives to install, repair or service the product; b) to repair damage resulting from improper use or connection to incompatible equipment; c) to repair any damage or malfunction caused by the use of non LYNX Technik supplies; or d) to service a product which has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty servicing the product.

THIS WARRANTY IS GIVEN BY LYNX TECHNIK WITH RESPECT TO THIS PRODUCT IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. LYNX TECHNIK AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LYNX TECHNIK`S RESPONSIBILITY TO REPAIR AND REPLACE DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THIS WARRANTY. LYNX TECHNIK AND ITS VENDORS WILL NOT BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES IRRESPECTIVE OF WHETHER LYNX TECHNIK OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

Regulatory information

Europe

Declaration of Conformity

We	LYNX Technik AG Brunnenweg 3 D-64331 Weiterstadt Germany
<i>Declare under our sole responsibility that the product</i>	
TYPE: P VD 5005 G	
<i>To which this declaration relates is in conformity with the following standards (environments E1-E3):</i>	
EN 55103-1 /1996	
EN 55103-2 /1996	
EN 60950 /2001	
<i>Following the provisions of 89/336/EEC and 73/23/EEC directives.</i>	
	Winfried Deckelmann
Weiterstadt, February 2004	
<i>Place and date of issue</i>	<i>Legal Signature</i>

USA

FCC 47 Part 15

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to the part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense

Contents

Warranty	3
Regulatory information	4
Europe	4
Declaration of Conformity	4
USA	4
FCC 47 Part 15.....	4
Contents	5
Getting Started.....	7
Packaging.....	7
Product Description	7
Key Features	8
Functional Diagram.....	8
Figure 1.1: Audio Processing.....	10
Module Layout	10
Connections	12
Video Connections.....	12
GPI	13
Audio Delay Pulse	13
Audio Delay – synchronous mode	14
Installation.....	15
Settings and Control	16
Multi Function Switch.....	17
Using the Local Display Menus.....	18
Navigation	18
Menu Structure	18
Factory Preset Condition	24
Auto Store	24
Alarm/LED Status Indicators	25
Status Indicators.....	25
Alarm Indicator	25
Locate Function	26
Specifications (P VD 5005 G).....	27
Available Options	28
Parts List	28
Service	29
Contact Information.....	30

This page is intentionally left blank

Getting Started

Packaging

The shipping carton and packaging materials provide protection for the module during transit. Please retain the shipping cartons in case subsequent shipping of the product becomes necessary.

Product Description

The P VD 5005 G is a high quality frame / line synchronizer designed primarily for broadcast and professional applications.

The two available SDI inputs can be synchronized to external sync with a delay of up to a maximum of 6 frames adjustable in 37ns increments. Minimum delay in Framesynch mode is 1 Frame, in Linesynch mode less than 1 μ s. SDI Inputs can be switched into the processor seamlessly, also via a GPI. A separate delay output is provided for external audio delay processing. From both SDI inputs 2 AES audio groups can be extracted, separately processed and embedded again to avoid audio clicks due to the video frame synchronization.

The P VD 5005 G features a wide range of available adjustments (via optional Rack Controller). Basic adjustments are possible using the local multi-function switch and integrated display.

CardModules are installed in the series 5000 card frame that can accommodate up to 10 CardModules. All modules are hot swappable and Options include full redundant power and a range of controller options.

Key Features

- Selectable frame or line synchronization mode of operation
- Dual standard operation (525/625)
- Delay of up to 6 frames max in 37ns increments
- Two SDI inputs with seamless (interference free) changeover via GPI
- SDI inputs with active loop through
- Two SDI outputs provided
- Delay output pulse for external audio delay processor
- Internal deembedding of two audio groups (4 x AES) with Channel Swap, Mute etc. and embedding of processed audio groups into SDI stream
- Local DIP-switch, push buttons and LED's for local control and status monitoring
- Microprocessor controlled with local display and menu driven user interface
- Flash Ram storage for settings
- Remote control interface

Functional Diagram

Figure 1 below is the basic functional diagram for the P VD 5005 G CardModule. The audio path is shown in detail as separate diagram.

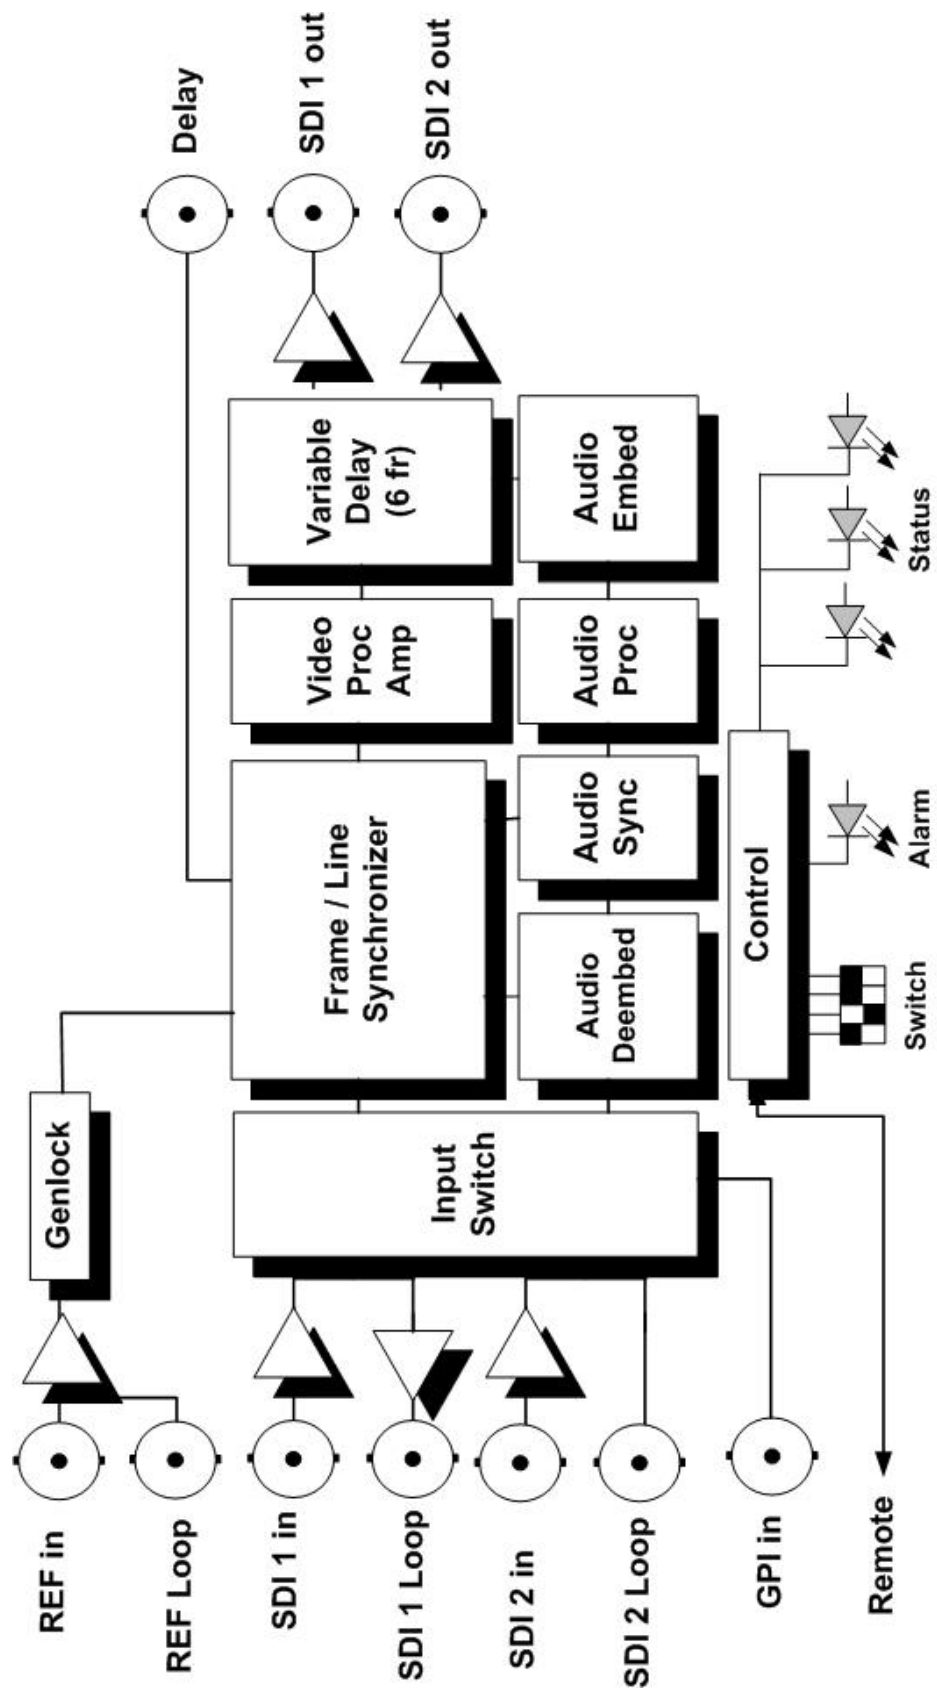


Figure 1- P VD 5005 G Functional Diagram

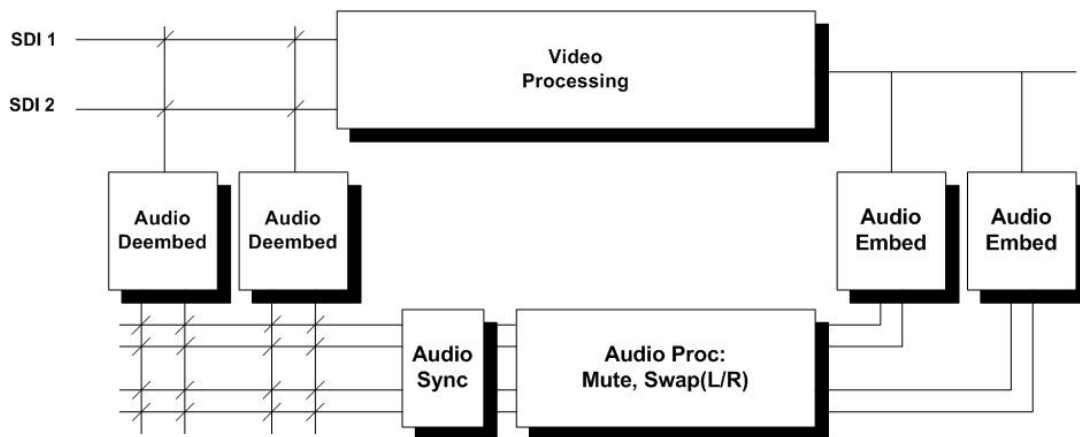


Figure 1.1: Audio Processing

Module Layout

Figure 2 shows the physical layout of the P VD 5005 G CardModule and also the connection panel which is fitted to the rear of the rack.

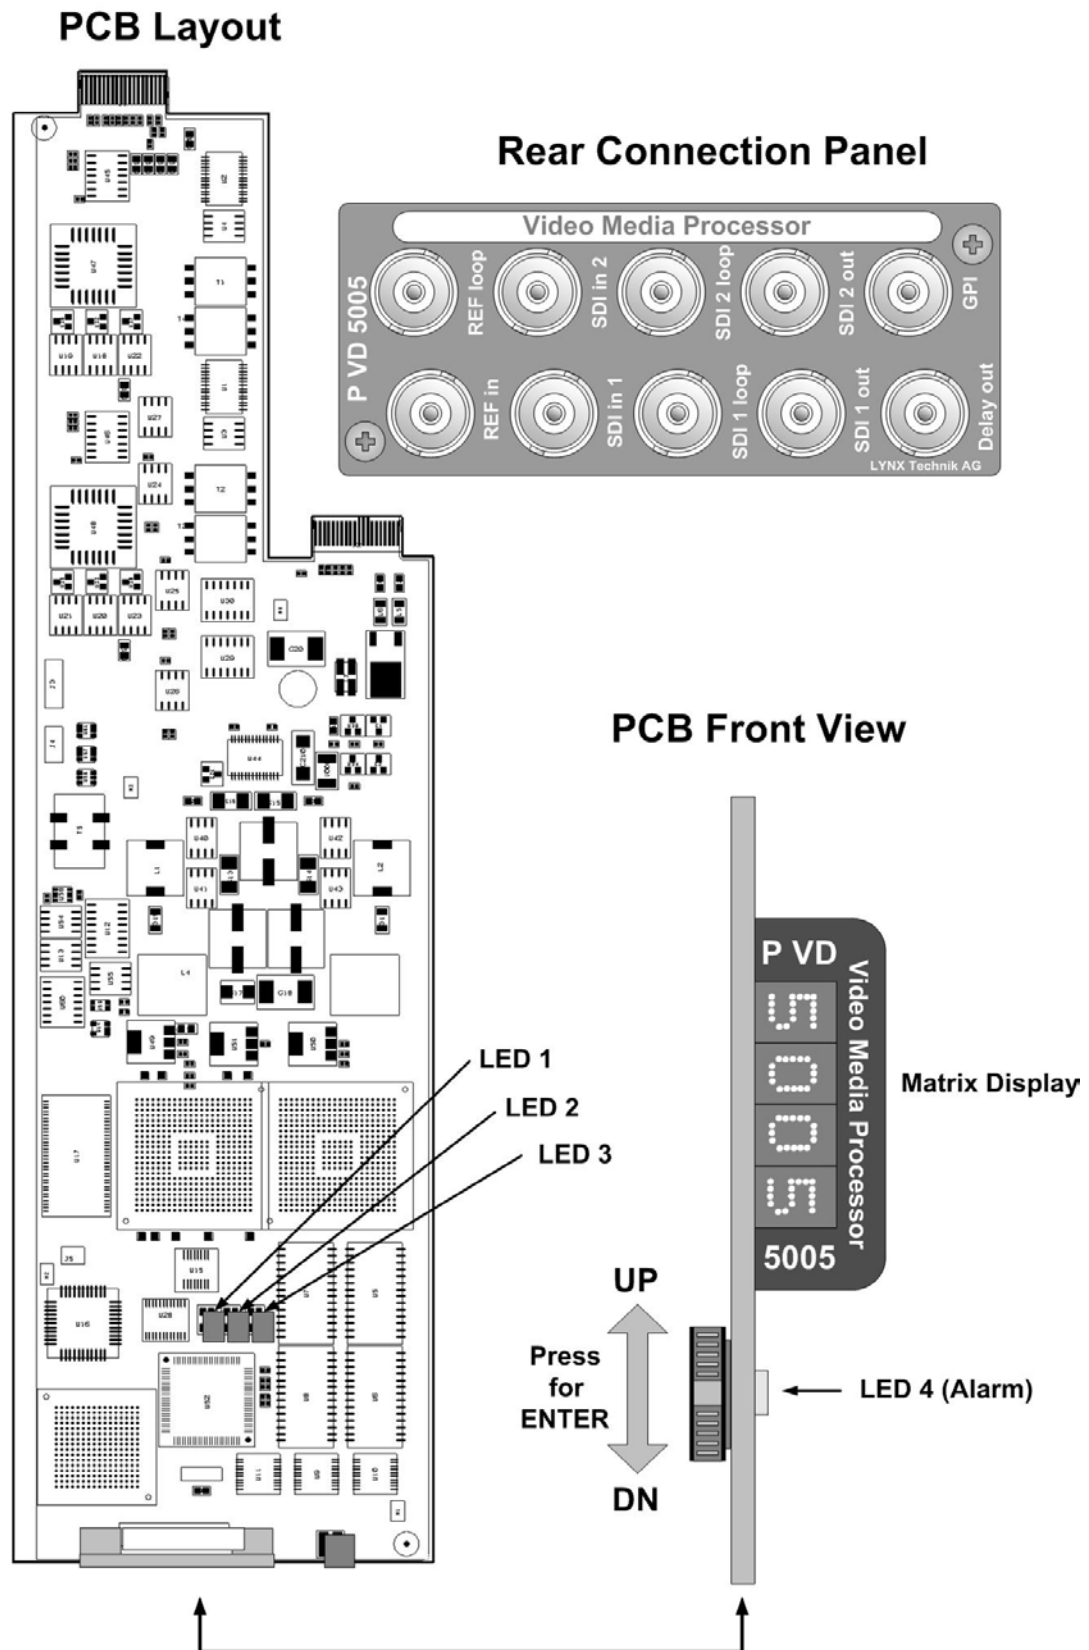


Figure 2: Physical layout P VD 5005 G

Connections

Video Connections

The P VD 5005 G CardModule is configured with standard 75 Ohm BNC connectors. Connection is self-explanatory. We recommend the use of high quality video cables for digital video connections to reduce the risk of interference or errors due to excessive cable attenuation. Some guidelines for max cable length are shown below.

250m (820 feet) Belden 8281 (270Mbits/s)


Note. Due to the compact design of the connection plate it will be necessary to use a connection tool to secure the BNC video connectors.

GPI

The two inputs of the P VD 5005 G can be switched via a GPI (General Purpose Input).


Connection is made through a BNC connector.

If there is no connection (OPEN/HIGH) between signal input and GND, IN1 is selected. If signal input is connected to GND (CLOSED/LOW), IN2 is selected.

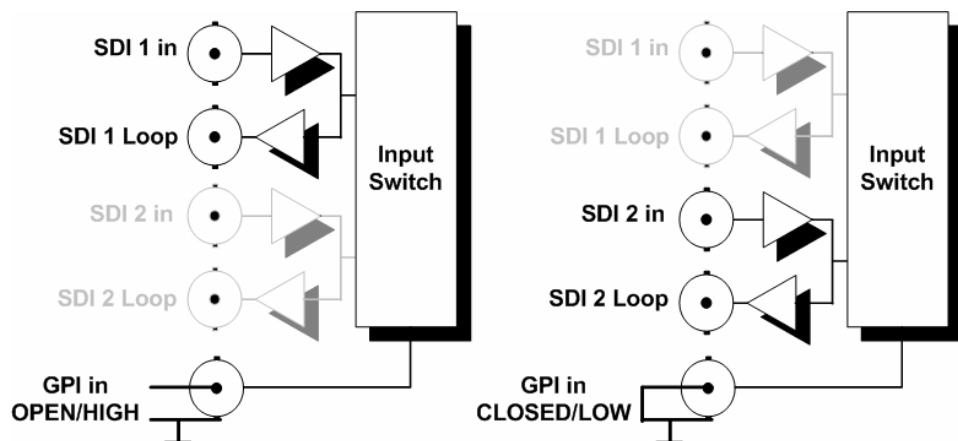

Audio Delay Pulse

The Audio Delay Pulse is connected through a BNC connector with TTL levels and needs 75 Ohm termination.

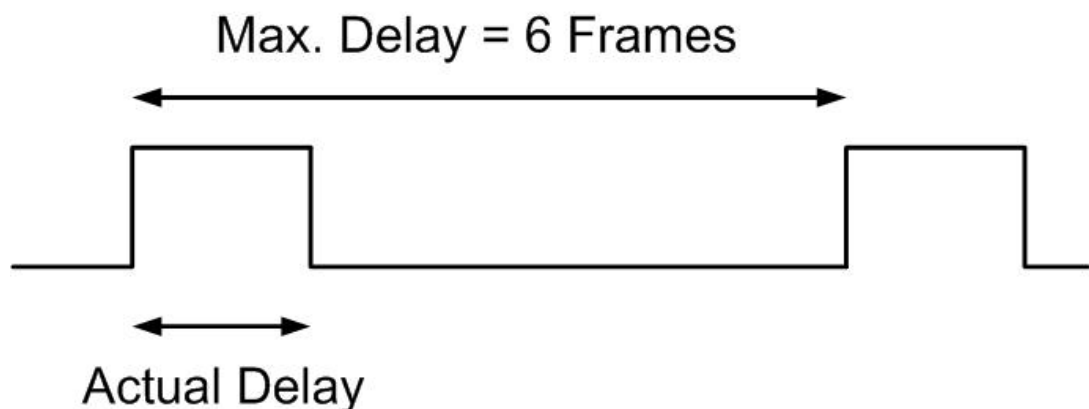

Min. Delay in Frame Synch Mode is 1 Frame

Min. Delay in Line Synch Mode is $< 1\mu\text{s}$

Audio Delay – synchronous mode

When the frame sync is used in normal asynchronous mode it is possible for the frame sync to drop or add frames to keep in sync (which is normal). Under these circumstances simply dropping frames of audio would result in audible clicks and pops. We overcome this by loosely tracking the audio to the video within an audio delay window of +/- 0.5 frame with respect to video.

If you have a synchronous input to the frame sync, then there is a new mode to switch the frame sync into a audio / video delay line function [expert tab, selection "synchronous"] In this mode the +/- 0.5 frame window is removed and the audio is perfectly in time with the video.

Installation



Caution

The CardModule is shipped in a protective anti-static bag. Please take suitable precautions to avoid static discharge onto any part of the PCB or components when handling module or serious damage could result.

Each Card Module is supplied with a rear connection panel and two mounting screws. Please follow the following procedure for installation of the card module into the Series 5000 Card Frame.

- a) Select a slot in the card frame where the CardModule will be located
- b) Remove the blank connection panel from the rear of the rack (if fitted)
- c) Install the rear connection panel using the screws supplied. Do not tighten the screws fully
- d) Slide the card module into the card frame and carefully check the CardModule easily connects to the rear connection plate. The card should fit easily and should not require excessive force to insert, if you feel any resistance, there could be something wrong with the rear connection panel location. Do not try and force the connection. Remove the rear connection panel and check alignment with the CardModule.
- e) Insert and remove the CardModule a few times to ensure correct alignment and then tighten the two screws to secure the rear connection plate

Settings and Control

The P VD 5005 G has an integrated micro-controller, which enables the module to be configured and controlled locally using the multifunction switch and 4 character dot matrix display, or from remote when using one of the optional controllers and control software.

Once set, all settings are automatically saved in non-volatile internal memory. (Flash ram) The module will always recall the settings used prior to power down.


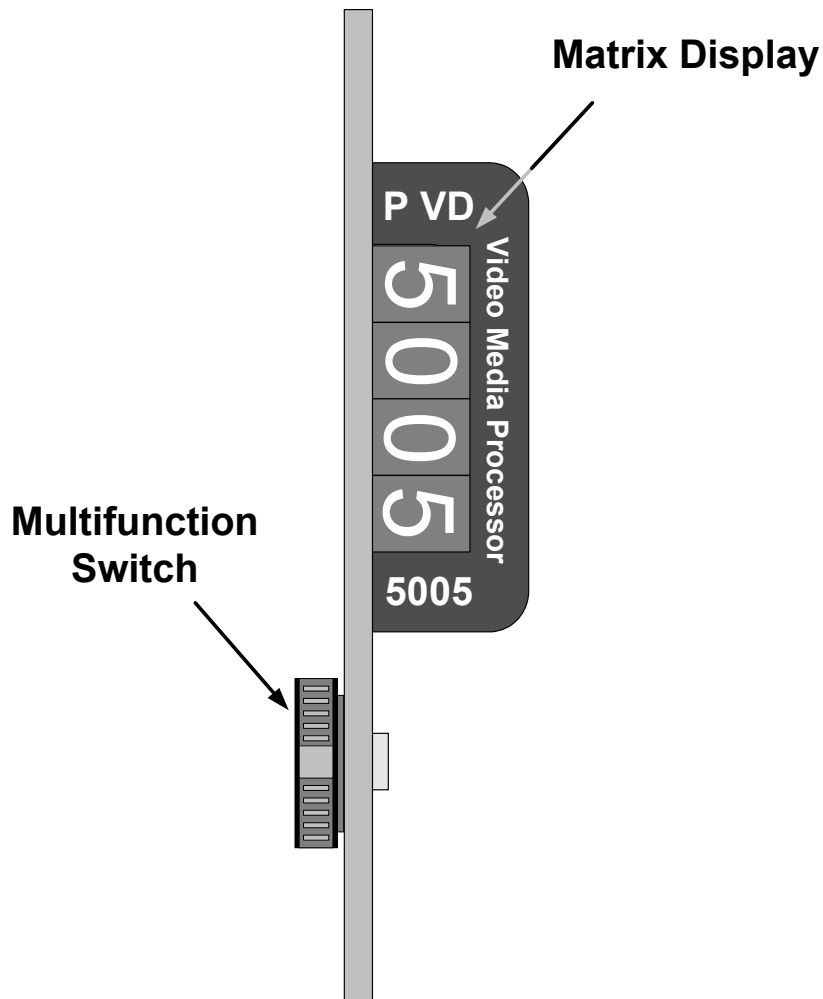


Figure 3 – Switch and Display Location

Multi Function Switch

The CardModule is equipped with a multi-function switch located on the front bottom edge of the card (refer to figure 3)

Multi-function Switch

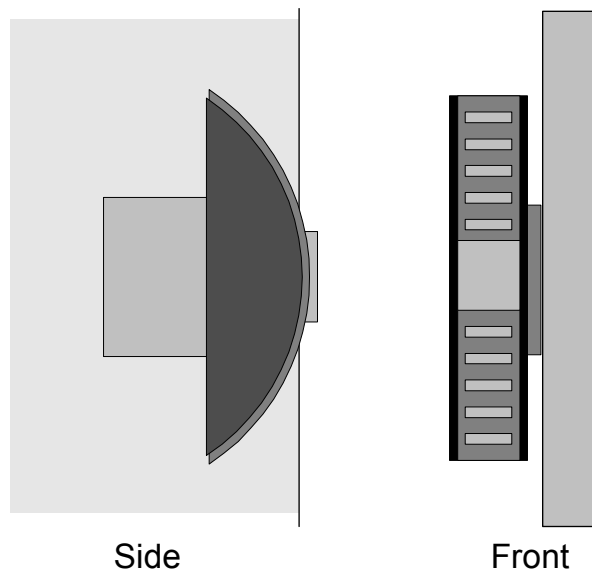

Switch Operations

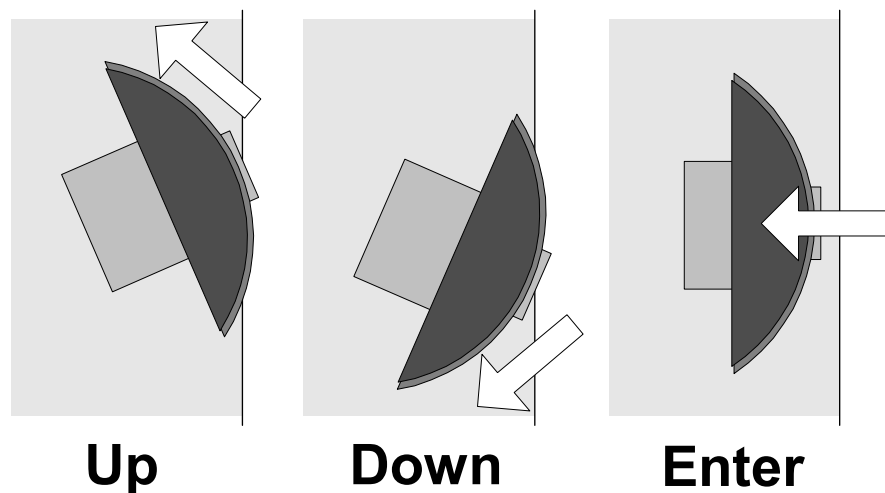


Figure 4 – Switch Operation

Using the Local Display Menus

Making local adjustments to the module is done using the multifunction switch and the integrated 4-character dot matrix display (figure 3). The menu system is layered, and navigation through the system is done using the **UP** and **DOWN** functions of the switch. **ENTER** is used to move between menu levels and also enter a selection.

Navigation

Switch Function	Operation
UP	Move UP within a level
DOWN	Move down within a level
ENTER	Change levels / Make selection

Menu Structure

The Menu structure is defined in the next table, and should be used when navigating through the system.

Notes / Tips.

ENTER moves between Levels


UP/DOWN moves between items within the level


When you enter a new setting the system will jump back one level in the menu system.

- The “back” selection in the menu structure will take you back one level when selected.
- When an item is selected which has several setting possibilities the first value displayed will be the value currently stored in the system. The order of the available settings for any menu item in the table supplied does not represent the order the settings will actually be displayed.
- If left unattended, the menu will default to the root display after a preset timeout.

ROOT	LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	COMMENTS
5005	SET	STD	AUTO 525 625 back		"Normal" Root display on module = Module type
		IN	OFF ON AUD back		Select video standard.
		BLNK	OFF ON AUD back		Select input: IN1 = SDI 1 in IN2 = SDI 2 in GPI: Input selected via GPI
		FRZ	FLD1 FLD2 FRME back		Select Vertical Blanking mode OFF = Transparent (input blanking passed) ON = Processor will add vert blanking to video AUD = Blank Audio samples only
					Select video freeze mode when input is lost FLD 1 = Field 1 is repeated FLD 2 = Field 2 is repeated FRME = frame grab, both fields frozen

			<div>MODE</div> <div>FRMa</div> <div>LINE</div> <div>FRMs</div> <div>back</div>	<div>Select Mode of operation for Synchronizer</div> <div>FRMa: Frame Synchronizer Mode</div> <div>for asynchronous SDI inputs</div> <div>LINE: Line Synchronizer Mode</div> <div>FRMs: Frame Synchronizer Mode</div> <div>for synchronous SDI inputs</div>
			<div>GENL</div> <div>EXT</div> <div>INT</div> <div>back</div>	<div>Use external reference</div> <div>Use internal (rack) reference</div>
			<div>GPI</div> <div>FRZ</div> <div>IN</div> <div>back</div>	<div>Select GPI function:</div> <div>FRZ: FREEZE activated by GPI</div> <div>IN: Input switch with GPI</div>
			<div>back</div>	
		<div>DELAY</div>	<div>PIXL</div> <div>0000</div>	<div>Enter pixel delay 0...1711 (525) 0...1727 (625)</div>
			<div>LINE</div> <div>0000</div>	<div>Enter line delay 0...524 (525) 0...624 (625)</div>
			<div>FRME</div> <div>0000</div> <div>back</div>	<div>Enter frame delay 0...6 frames</div>

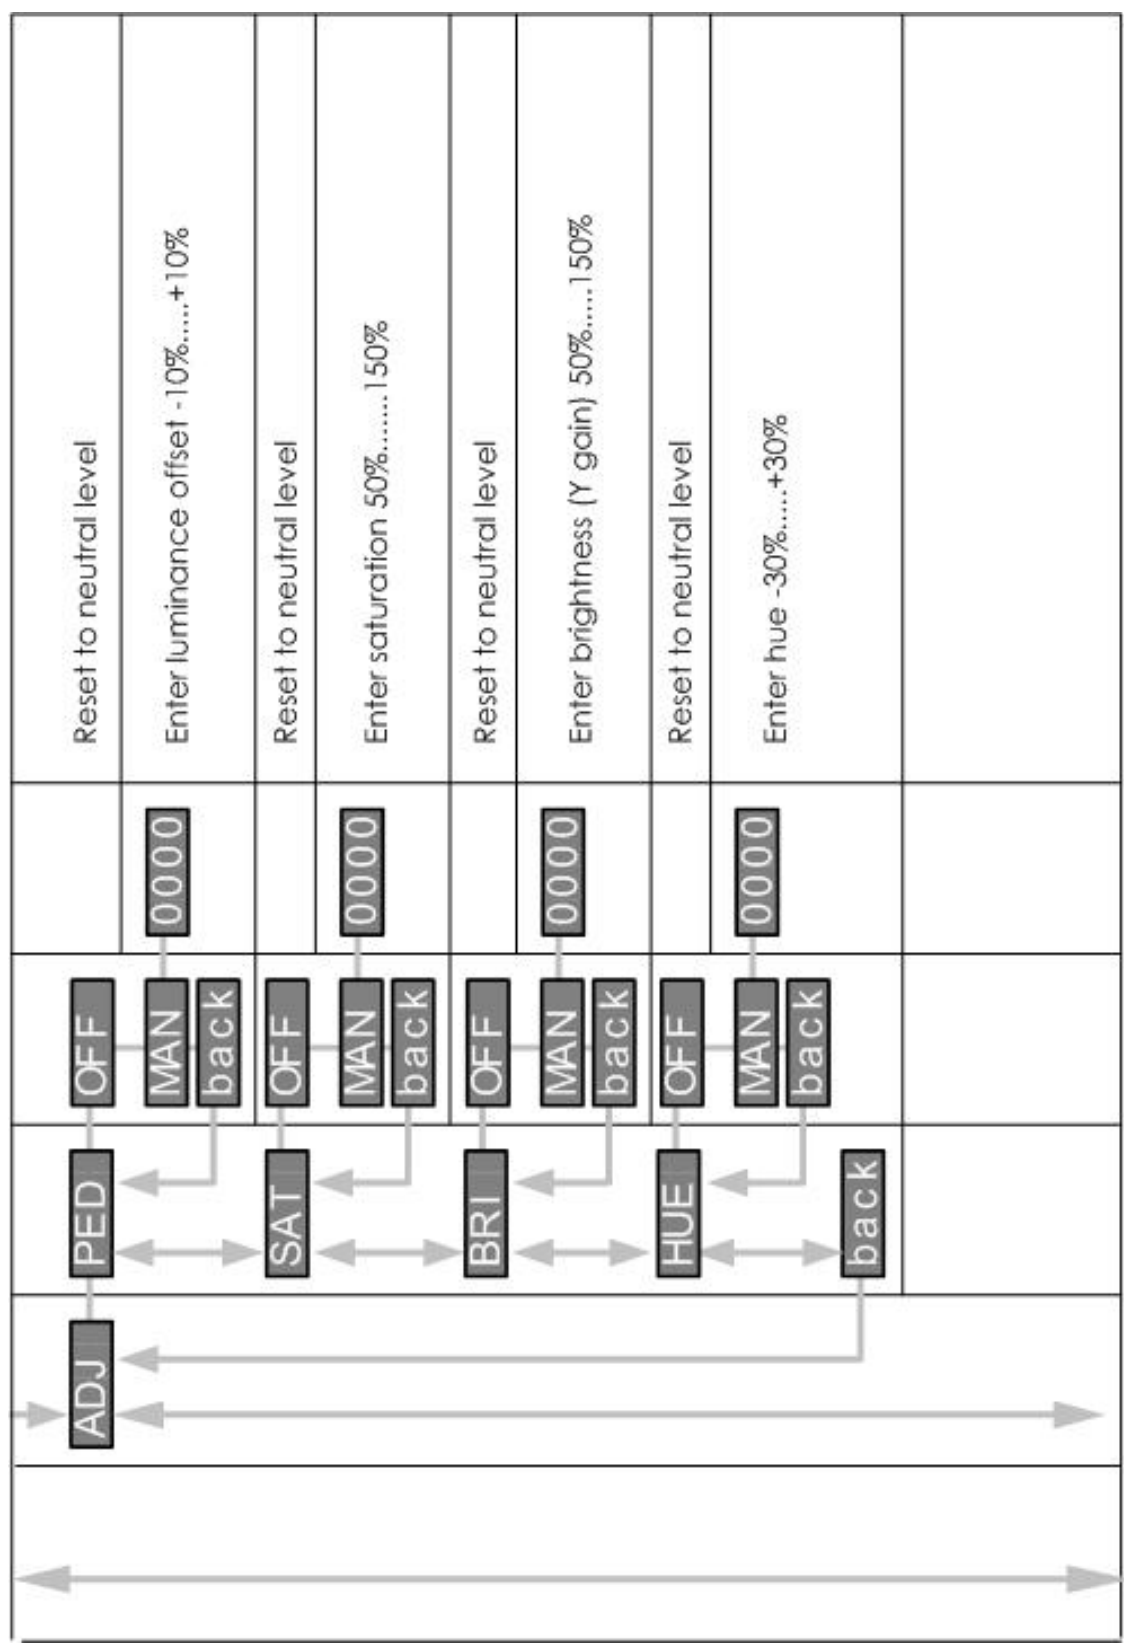

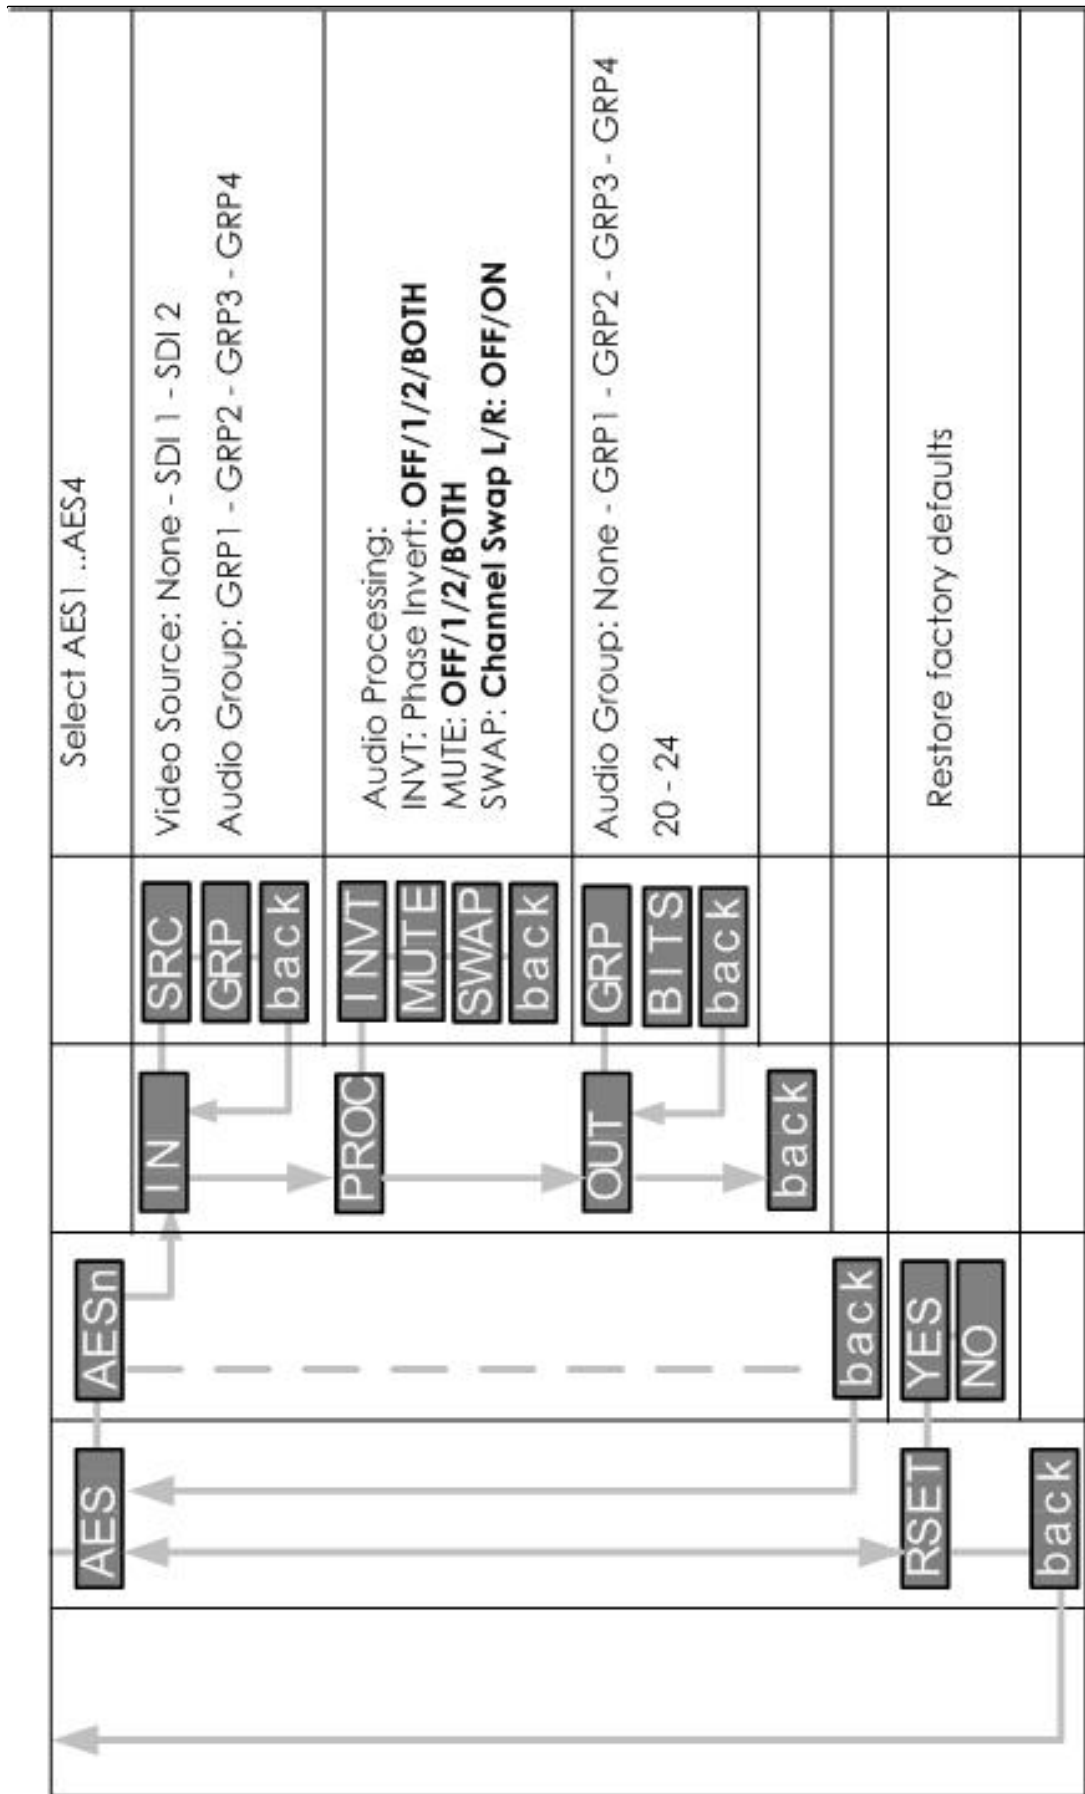

Factory Preset Condition

The P VD 5005 G is delivered programmed and preset for the following mode of operation:

Mode	Frame Synchronizer
Input	Input 1
Standard	Auto
Blanking (VBI)	Transparent
Freeze mode	Frame
Reference	External
Line delay (CH A)	0000
Pixel delay (CH A)	0000
Frame delay (CHA)	0000
Line delay (CH B)	0000
Pixel delay (CH B)	0000
Frame delay (CHB)	0000
Pedestal	default (OFF)
Saturation	default (OFF)
Brightness	default (OFF)
Hue	default (OFF)

If this is the mode of operation required, then no adjustments are necessary.

These settings can be recalled at any time by selecting reset from the menu system.

Auto Store

If no parameters are changed for 10 seconds then the current settings will be written into flash memory automatically, this can be seen by the alarm LED flashing yellow four times.

Alarm/LED Status Indicators

The P VD 5005 G module has integral LED indicators, which serve as alarm and status indication for the module. Function is described below.

Status Indicators

3 status LED`s are provided on the PCB, LED 1, LED 2, LED 3 (Figure 2)

LED	Color	Indication
1	Green	Ref = 525/60 Hz
	Yellow	Ref = 625/50 Hz
	Red	External Ref = invalid or missing
2	Green	SDI 1 Input = 525/60 Hz
	Yellow	SDI 1 Input = 625/50 Hz
	Red	SDI 1 Input = invalid or missing
3	Green	SDI 2 Input = 525/60 Hz
	Yellow	SDI 2 Input = 625/50 Hz
	Red	SDI 2 Input = invalid or missing

Alarm Indicator

There is also a single alarm LED on the lower edge of the module LED 4. This is visible through the card frame front cover and provides a general indication of the module status.


LED Color	Indication
Green	Normal Operation
Red	Board Failure

LED **OFF** indicates power is lost, or there is a power supply fault.

Locate Function

For larger systems which may have multiple cards of the same type in a single rack, or multiple rack systems on a large central control system we have added a useful utility which will help to visually locate a suspect module quickly (When used in conjunction with the optional control system and software)

Once the specific module has been selected on the control system there is a locate button on the top of the GUI:

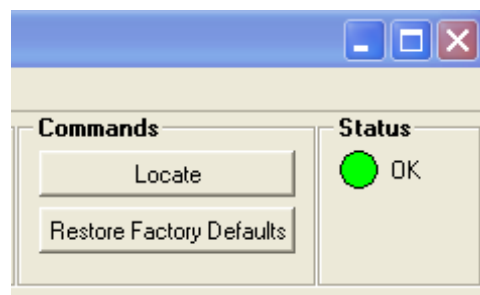

Locate Function in Control System

When Locate is selected the status indicator on the GUI and the alarm LED will flash yellow in the following continuous sequence.

3 short flashes.... Pause.... 3 short flashes ...

Use of the locate function will not interfere with the normal operation of the module.

For more details on this feature please check the documentation supplied with the controller software.

Specifications *(P VD 5005 G)*

Video Inputs

Signal	2 x SDI inputs - selectable (SMPTE 259M-C)
Input Impedance	75 Ohms
Connection	BNC
Cable Length	250 m; Belden 8281 (270Mbit/s)
Return Loss	> 15dB (270 MHz)

Reference Input

Signal	Composite analog sync, 525/60Hz or 625/50Hz
Detection	Automatic
Connection	BNC
Impedance	75 Ohms

Outputs

Signal	2 x SDI (SMPTE 259M-C)
Connection	BNC
Impedance	75 Ohms
Return Loss	> 15dB (270 MHz)
Jitter	< 0.2 ui

Delay Output

Signal	TTL pulse duty cycle = delay from input to output
Connection	BNC, 75 Ohm

Operating Modes

Line	Line Synchronizer
Frame	Frame Synchronizer

Performance

Adjustment range	Min delay to 6 frames max in 37ns increments; Min Delay: Frame Synch Mode: 1 Frame Line Synch Mode: 1 μ s
Control	Local display and multi-function switch and via remote when using a rack controller and LYNX control software.

Electrical Specifications

Operating Voltage	12 VDC
Power Consumption	9 W
Safety	IEC 60950/ EN 60950/VDE 0805

Mechanical

Size	283mm x 78mm
Weight	Card module 120g, connection panel 50g

Ambient

Temperature	5°C to 40°C Maintaining specifications
Humidity	Max 90% non condensing

Supplied Accessories

Documentation	P VD 5005 G Reference Manual
---------------	------------------------------

Available Options

Below is a list of related products for the P VD 5005 G CardModule. Please refer to product brochures or our web site for more detailed information.

Model	Description
R FR 5010	Series 5000 Rack Frame (empty) with single power supply
R PS 5010	Redundant power supply for the R FR 5010 Card Frame
R CT 5020	Rack controller for the R FR 5010 Card Frame
R CT 5010	Rack Bus Extension for the R FR 5010 Card Frame. In combination with R CT 5020

Parts List

Due to the very dense design and miniature surface mount technology the module is not field serviceable. The information for a replacement assembly is below.

P VD 5005 G CardModule (complete)

Description	Media Processor
Model Number	P VD 5005 G
Part Number	6.155.008.264

Sub Assemblies:

P VD 5005 G Processing Board only (BS 5012 E)

Part Number	6.155.007.303
-------------	---------------

Rear Connection Panel for P VD 5005 G (MA 5020)

Part Number	6.155.007.230
-------------	---------------

Service

If you are experiencing problems, or have questions concerning your P VD 5005 G CardModule please contact your local distributor for assistance.

We offer a fixed cost service exchange program for defective Series 5000 CardModules out of Warranty. Please contact your distributor or check our web site for details on this program.

More detailed information and product updates may be available on our web site:

www.lynx-technik.com

You will also find links to contact us directly for assistance.

Contact Information

Please contact your local distributor; this is your local and fastest method for obtaining support and sales information.

LYNX Technik can be contacted directly using the information below.

Address LYNX Technik AG
Brunnenweg 3
D-64331 Weiterstadt
Germany.

Website www.lynx-technik.com

E-Mail info@lynx-technik.com

LYNX Technik manufactures a complete range of high quality modular products for broadcast and Professional markets, please contact your local representative or visit our web site for more product information.



This page is intentionally left blank

